




DUCTILE STEEL

- Made out of Ductile Iron, Extra thick walled, heavy-duty core, hub and tread
- Variety of bearing options for optimal performance at different applications
- Temperature range: -45°F to 800°F (with bronze bearing)
- Tensile strength of 45,000PSI

DS WHEELS • CAPACITY 17000

DS10LR70

DS60JR04

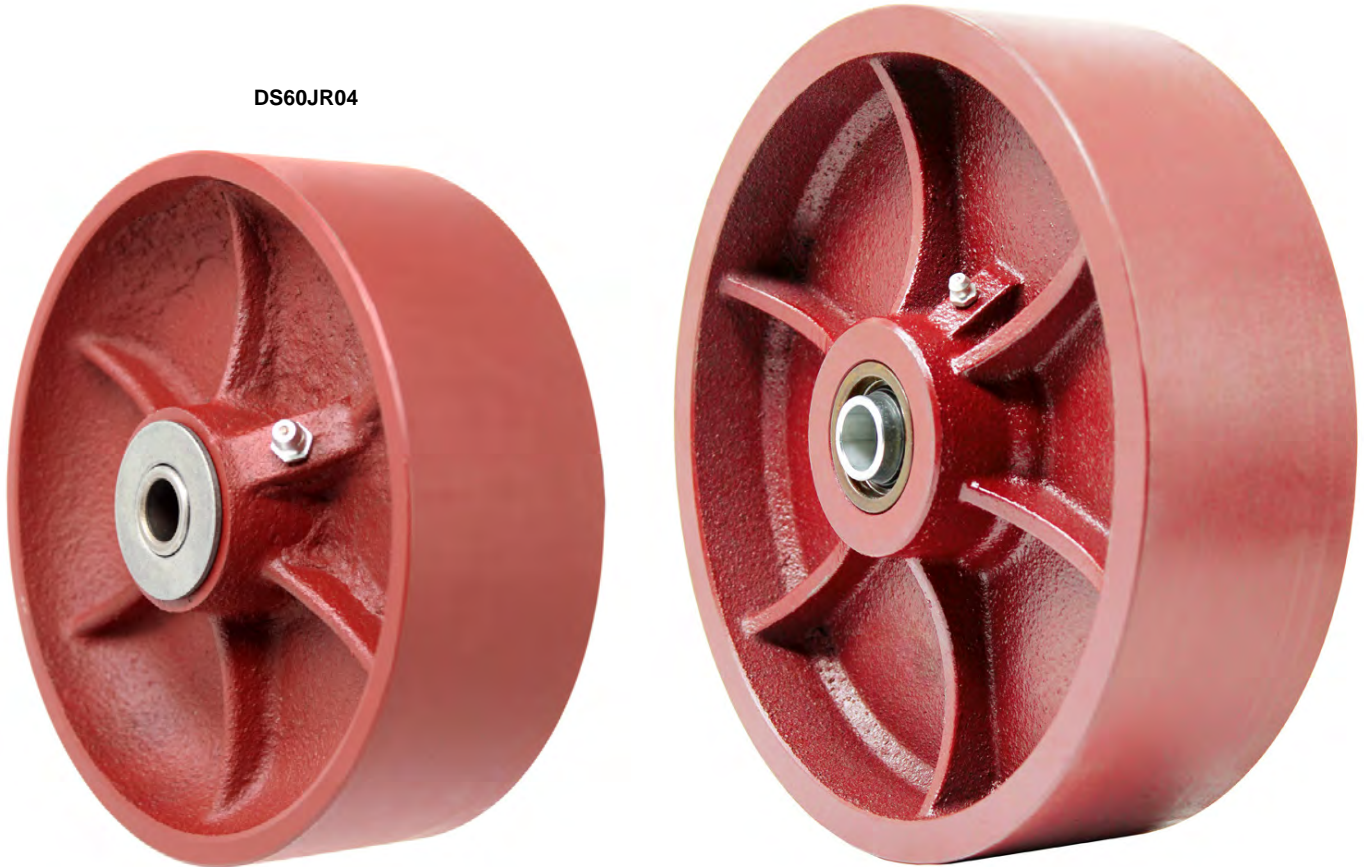

Wheel Diameter	Tread Width	Hub Length	Load Capacity	Bore I.D.	Replace ** with desired bearing code					Part Number
					Roller BRG	Tapered Roller BRG	Precision Ball BRG	Delrin BRG	Bronze BRG	
4"	1-1/2"	2"	1200	1-3/16"						DS40HR84
				1/2"	92~					DS40HR92
				3/4"	08					DS40HR08
4"	2"	2-3/16"	1500	1-3/16"						DS40JR84
		2-7/16"		1/2"	92~		60	12, 56		DS40JR**
				5/8"	02					
				3/4"	04,09		11, 57	B1, B5		
4"	2'	2-7/16"	1500	1/2"			63		DS40JR63	
5"	2"	2-3/16"	1500	1-3/16"						DS50JR84
		2-7/16"		1/2"	92~		60	12, 56		DS50JR**
				5/8"	02					
				3/4"	04,09		11, 57	B1, B5		
5"	2"	2-7/16"	1500	1/2"			63		DS50JR63	
5"	2-1/2"	2-3/4"	2000	1-15/16"						DS50KR85
		3"		3/4"	93~		89			DS50KR**
				1"	23			B7		
				1-1/4"	25					



DS WHEELS • CAPACITY 17000

Wheel Diameter	Tread Width	Hub Length	Load Capacity	Bore I.D.	Replace ** with desired bearing code					Part Number
					Roller BRG	Tapered Roller BRG	Precision Ball BRG	Delrin BRG	Bronze BRG	
6"	2"	2-3/16"	2000	1-3/16"						DS60JR84
		2-7/16"		1/2"	92~		60	12, 56		DS60JR**
				5/8"	02					
6"	2"	2-7/16"	2000	1/2"						DS60JR63
6"	2"	2-7/16"	2000	1/2"		73				DS60JR73
6"	2-1/2"	2-3/4"	3500	1-15/16"						DS60KR85
		3"		3/4"	93~		89			DS60KR**
				1"	23			B7		
				1-1/4"	25					
6"	2-1/2"	3"	3500	3/4"		70			DS60KR70	
6"	2-1/2"	3"	3500	1"		71			DS60KR71	
6"	2-1/2"	3-1/4"	3500	1-15/16"						DS60QR85
		3-1/2"		3/4"	93~		69			DS60QR**
				1"	24		71P		B8	
				1-1/4"	26					
6"	3"	3-1/4"	6000	1-15/16"						DS60LR85
		3-1/2"		3/4"	93~		69			DS60LR**
				1"	24		71P	58	B8	
				1-1/4"	26					
6"	3"	3-1/2"	8000	3/4"		70			DS60LR70	
6"	3"	3-1/2"	8000	1"		71			DS60LR71	
8"	2"	2-3/16"	2300	1-3/16"						DS80JR84
		2-7/16"		1/2"	92~		60	12, 56		DS80JR**
				5/8"	02					
				3/4"	04,09			11, 57	B1, B5	
8"	2-1/2"	2-3/4"	4000	1-15/16"						DS80KR85
		3"		3/4"	93~		89			DS80KR**
				1"	23			B7		
				1-1/4"	25					
8"	2-1/2"	3"	4000	3/4"		70			DS80KR70	
8"	2-1/2"	3-1/4"	4000	1-15/16"						DS80QR85
		3-1/2"		3/4"	93~		69			DS80QR**
				1"	24		71P		B8	
				1-1/4"	26					
8"	3"	3-1/4"	6000	1-15/16"						DS80LR85
		3-1/2"		3/4"	93~		69			DS80LR**
				1"	24		71P	58	B8	
				1-1/4"	26					
8"	3"	3-1/2"	6000	3/4"		65			DS80LR65	
8"	3"	3-1/2"	6000	1"		67			DS80LR67	
8"	3"	3-1/2"	10000	3/4"		70			DS80LR70	
8"	4"	4-1/4"	10000	2-7/16"						DS80NR86
		4-9/16"		1-1/4"	31					DS80NR31
				1-1/2"	33					
				1"						
8"	4"	4-9/16"	17000	1-1/4"		74			DS80NR74	
8"	4"	4-9/16"	10000	1"			67		DS80NR67	
10"	2-1/2"	2-3/4"	4500	1-15/16"						DS10KR85
		3"		3/4"	93~		89			DS10KR**
				1"	23			B7		
				1-1/4"	25					
10"	2-1/2"	3"	4500	3/4"		70			DS10KR70	
10"	2-1/2"	3-1/4"	4500	1-15/16"						DS10QR85
		3-1/2"		3/4"	93~		69			DS10QR**
				1"	24		71P	58	B8	
				1-1/4"	26					
10"	3"	3-1/4"	6000	1-15/16"						DS10LR85
		3-1/2"		3/4"	93~		69			DS10LR**
				1"	24		71P	58	B8	
				1-1/4"	26					
10"	3"	3-1/2"	10000	3/4"		70			DS10LR70	
10"	3"	3-1/2"	10000	1"		71			DS10LR71	
10"	4"	4-1/4"	10000	2-7/16"						DS10NR86
		4-9/16"		1-1/4"	31					DS10NR31
				1-1/2"	33					
				1"						
10"	4"	4-9/16"	10000	1"			67		DS10NR67	
10"	4"	4-9/16"	17000	1-1/4"		74			DS10NR74	
12"	3"	3-1/4"	6000	1-15/16"						DS12LR85
		3-1/2"		3/4"	93~		69			DS12LR**
				1"	24		71P	58	B8	
				1-1/4"	26					
12"	3"	3-1/4"	10000	3/4"		70			DS12LR70	
12"	3"	3-1/4"	10000	1"		71			DS12LR71	
12"	3-1/2"	4-1/4"	10000	1-1/4"		74			DS12MR74	
12"	4"	4-9/16"	17000	1-1/4"		74			DS12NR74	
14"	3"	3-1/4"	6000	1-15/16"						DS14LR85
		3-1/2"		3/4"	93~		69			DS14LR**
				1"	24		71P	58	B8	
				1-1/4"	26					
14"	3"	3-1/2"	10000	1-1/4"		71			DS14LR71	

~including
spanner
bushing