




DURALASTOMER

- Standard color: Blue. Different color is available, please consult factory.
- Solid casted polyurethane elastomer for its maximum strength.
- Smooth and crown surface and low rolling resistance
- Temperature Range: -50°F to 180° F
- Durometer: Shore D 60(+/- 5)

SU WHEELS • CAPACITY 1000

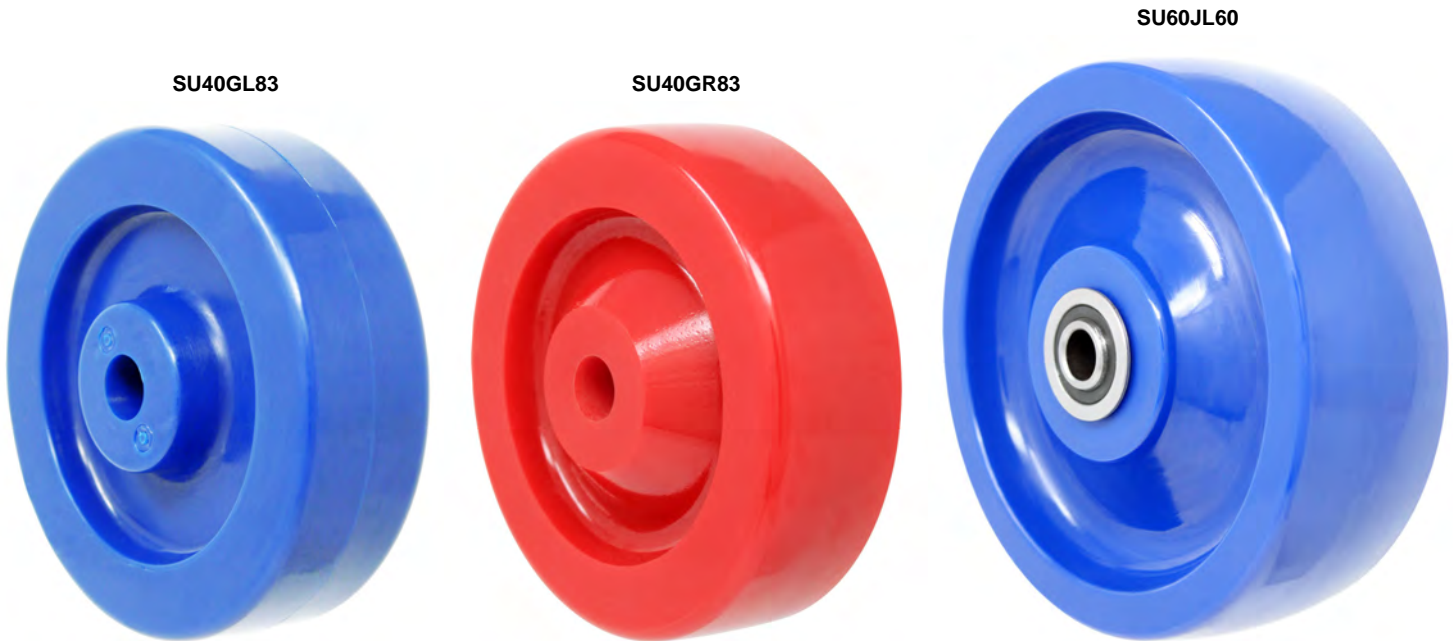

Wheel Diameter	Tread Width	Hub Length	Load Capacity	Bore I.D.	Replace ** with desired bearing code					Part Number	
					Roller Brg.	Stainless Roller Brg.	Prec. Ball Brg.	Stainless Prec. Ball Brg.	Delrin Brg.		
3"	1-1/4"(Blue)	1-9/16"	300	1/2"						SU30GL83	
				3/8"						SU30GL90	
	1-1/4"(Red)			1/2"						SU30GR83	
				3/8"						SU30GR90	
4"	1-1/4"(Blue)	1-9/16"	400	1/2"						SU40GL83	
				3/8"						SU40GL90	
	1-1/4"(Red)			1/2"						SU40GR83	
				3/8"						SU40GR90	
4"	2"	2-3/16"	750	1-3/16"						SU40JL84	
		2-7/16"		1/2"	92	9S	60,63	6S	56, 12	SU40JL**	
				3/4"	09	05			57, 11		
5"	1-1/4"	1-9/16"	700	1/2"						SU50GL83	
	1-1/2"	1-7/8"	700	3/8"						SU50GL90	
				1-3/16"						SU50HL84	
5"	2"	2-3/16"	800	1-3/16"						SU50JL84	
		2-7/16"		1/2"	92	9S	60,63	6S	56, 12	SU50JL**	
	3/4"			09	05			57, 11			
	1-3/16"										SU60HL84
6"	1-1/2"	1-5/8"	600	1-3/16"						SU60HL84	
		1-7/8"		1/2"	92		6M		56, 12	SU60HL**	
				3/4"	03				57, 11		
	2"	2-3/16"	900	1-3/16"							SU60JL84
		2-7/16"		1/2"	92	9S	60, 63~	6S, 72~	56, 12	SU60JL**	
3/4"	09			05			57, 11				
1-3/16"									SU80JL84		
8"	2"	2-3/16"	1000	1-3/16"						SU80JL84	
		2-7/16"		1/2"	92	9S	60, 63~	6S, 72~	56, 12	SU80JL**	
				3/4"	09	05			57, 11		

90 & 92
Include
Spanner

~ Include top
hats.