




PHENOLIC

- Canvas fiber filled Phenolic for high impact resistance
- Temperature range: -50° F to +250° F
- Durometer: Shore D 90(+/-5)

PH80JB60

PH60JB60

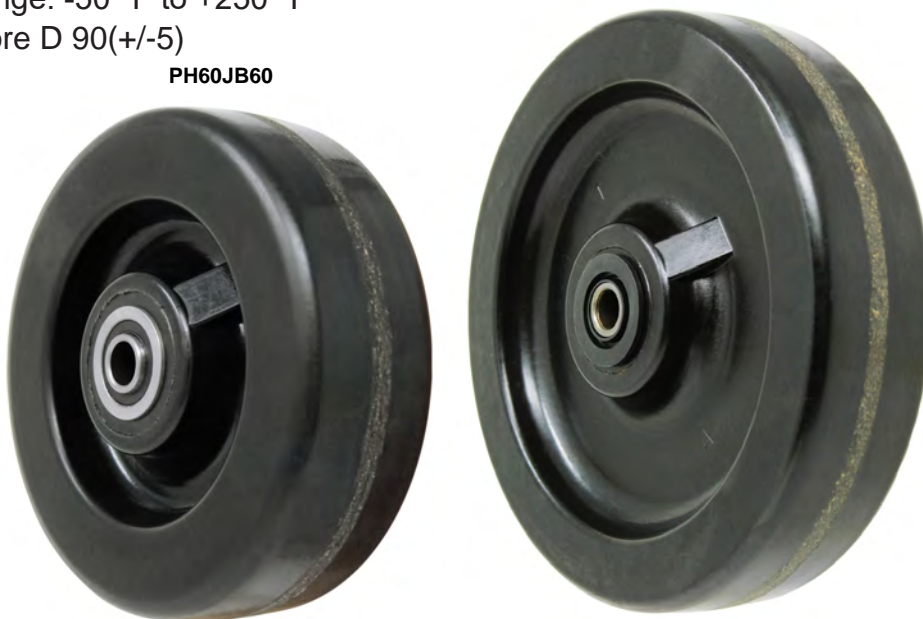

PH WHEELS • CAPACITY 3500

Wheel Diameter	Tread Width	Hub Length	Load Capacity	Bore I.D.	Replace ** with desired bearings code				Part Number
					Roller BRG	Precision Ball BRG	Delrin BRG	Bronze BRG	
3"	1-1/4"	1-3/8"	300	1/2"					PH30GB83
3"	1-1/4"	1-3/8"	300	1-1/16"					PH30GB5P
3"	1-1/4"	1-3/8"	300	1/2"	00				PH30GB00
3-1/2"	1-1/4"	1-3/8"	350	1/2"					PH35GB83
4"	1-1/4"	1-3/8"	300	1/2"					PH40GB83
4"	1-1/4"	1-3/8"	400	1-1/16"					PH40GB5P
4"	1-1/4"	1-3/8"	400	1/2"	00				PH40GB00
5"	1-1/4"	1-3/8"	450	1/2"					PH50GB83
3"	1-3/4"	1-7/8"	1000	1-3/16"					PH30IB84
3"	1-3/4"	1-7/8"	1000	1/2"	92~				MA30IB92
3"	1-3/4"	1-7/8"	1000	3/4"	36				PH30IB36
3"	1-1/2"	1-5/8"	600	1/2"					PH30HB83
3"	1-1/2"	1-5/8"	600	1-3/16"					PH30HB84
3"	1-1/2"	1-7/8"	600	1/2"	92~	6M	12, 56		PH30HB**
3"	1-1/2"	1-7/8"	600	5/8"	01				PH30HB**
3"	1-1/2"	1-7/8"	600	3/4"	03		11, 57		PH30HB**
3-1/4"	1-1/2"	1-5/8"	600	1-3/16"					PH34HB84
3-1/4"	1-1/2"	1-7/8"	600	1/2"	92~	6M	12, 56		PH34HB**
3-1/4"	1-1/2"	1-7/8"	600	5/8"	01				PH34HB**
3-1/4"	1-1/2"	1-7/8"	600	3/4"	03		11, 57		PH34HB**
4"	1-1/2"	1-5/8"	600	1/2"					PH40HB83
4"	1-1/2"	1-5/8"	600	3/4"					PH40HB88
4"	1-1/2"	1-5/8"	600	1-3/16"					PH40HB84
4"	1-1/2"	1-7/8"	600	1/2"	92~	6M	12, 56		PH40HB**
4"	1-1/2"	1-7/8"	600	5/8"	01				PH40HB**
4"	1-1/2"	1-7/8"	600	3/4"	03		11, 57		PH40HB**
5"	1-1/2"	1-5/8"	600	1/2"					PH50HB83
5"	1-1/2"	1-5/8"	600	1-3/16"					PH50HB84
5"	1-1/2"	1-7/8"	600	1/2"	92~	6M	12, 56		PH50HB**
5"	1-1/2"	1-7/8"	600	5/8"	01				PH50HB**
5"	1-1/2"	1-7/8"	600	3/4"	03		11, 57		PH50HB**
6"	1-1/2"	1-5/8"	800	1-3/16"					PH60HB84
6"	1-1/2"	1-7/8"	800	1/2"	92~	6M	12, 56		PH60HB**
6"	1-1/2"	1-7/8"	800	5/8"	01				PH60HB**
6"	1-1/2"	1-7/8"	800	3/4"	03		11, 57		PH60HB**
3-1/4"	2"	2-3/16"	700	1-3/16"					PH34JB84
3-1/4"	2"	2-7/16"	700	1/2"	92~		12,56		PH34JB**
3-1/4"	2"	2-7/16"	700	5/8"	02				PH34JB**
3-1/4"	2"	2-7/16"	700	3/4"	04, 09	60, 6S	11, 57	B1, B5	PH34JB**



Wheel Diameter	Tread Width	Hub Length	Load Capacity	Bore I.D.	Replace ** with desired bearings code				Part Number
					Roller BRG	Precision Ball BRG	Delrin BRG	Bronze BRG	
4"	2"	2-3/16"	800	1-3/16"					PH40JB84
		2-7/16"		1/2"	92~		12,56		PH40JB**
				5/8"	02				
				3/4"	04, 09	60, 6S	11, 57	B1, B5	
4"	2" (Straight-sided)	2-3/16"	1000	1-3/16"					PH40TB84
		2-7/16"		1/2"	92~		12,56		PH40TB**
				5/8"	02				
				3/4"	04, 09	60, 6S	11, 57	B1, B5	
5"	2"	2-3/16"	100	3/4"					PH50JB88
5"	2"	2-3/16"	1000	1-3/16"					PH50JB84
		2-7/16"		1/2"	92~		12,56		PH50JG**
				5/8"	02				
				3/4"	04, 09	60, 6S	11, 57	B1, B5	
5"	2" (Straight-sided)	2-3/16"	1200	1-3/16"					PH50TB84
		2-7/16"		1/2"	92~		12,56		PH50TB**
				5/8"	02				
				3/4"	04, 09	60, 6S	11, 57	B1, B5	
6"	2"	2-3/16"	1200	3/4"				B1, B5	PH60JB88
6"	2"	2-3/16"	1200	1-3/16"					PH60JB84
		2-7/16"		1/2"	92~		12,56		PH60JB**
				5/8"	02				
				3/4"	04, 09	60, 6S	11, 57	B1, B5	
6"	2" (Straight-sided)	2-3/16"	1500	1-3/16"					PH60TB84
		2-7/16"		1/2"	92~		12,56		PH60TB**
				5/8"	02				
				3/4"	04, 09	60, 6S	11, 57	B1, B5	
6"	2-1/2"	2-3/4"	1400	1-3/16"					PH60KB84
		3"		1/2"	92~				PH60KB**
				3/4"	06				
6"	2-1/2"	2-3/4"	1600	1-15/16"					PH60KB85
		3"		3/4"	93~	89			PH60KB**
				1"	23			B7	
				1-1/4"	25				
6"	2-1/2"	3-1/4"	1600	1-15/16"					PH60QB85
		3-1/2"		3/4"	93	69			PH60QB**
				1"	24	R1	58	B8	
				1-1/4"	26				
6"	3"	3-1/4"	2000	1-15/16"					PH60LB85
		3-1/2"		3/4"	93~	69			PH60LB**
				1"	24	R1	58	B8	
				1-1/4"	26				



Wheel Diameter	Tread Width	Hub Length	Load Capacity	Bore I.D.	Replace ** with desired bearings code				Part Number
					Roller BRG	Precision Ball BRG	Delrin BRG	Bronze BRG	
8"	2"	2-3/16"	1400	1-3/16"					PH80JB84
		2-7/16"		1/2"	92~		12,56		PH80JB**
				5/8"	02				
				3/4"	04, 09	60, 6S	11, 57	B1, B5	
8"	2-1/2"	2-3/4"	1800	1-3/16"					PH80KB84
		3"		1/2"	92~				PH80KB**
				3/4"	06				
8"	2-1/2"	3"	2000	1-15/16"					PH80KB85
				3/4"	93~	89			PH80KG**
				1"	23			B7	
				1-1/4"	25				
8"	2-1/2"	3-1/4"	2000	1-15/16"					PH80QB85
		3-1/2"		3/4"	93~	69			PH80QB**
				1"	24	R1	58	B8	
				1-1/4"	26				
8"	3"	3-1/2"	2500	1-15/16"					PH80LB85
				3/4"	93~	69			PH80LB**
				1"	24	R1	58	B8	
				1-1/4"	26				
8"	3" Straight Sided	3-1/2"	2500	1-15/16"					PH80LT85
				3/4"	93~	69			PH80LT**
				1"	24	R1	58	B8	
				1-1/4"	26				
10"	2-1/2"	2-3/4"	2200	1-3/16"					PH10KB84
		3"		1/2"	92~				PH10KB**
				3/4"	06				
10"	2-1/2"	3"	2500	1-15/16"					PH10KB85
				3/4"	93~	89			PH10KB**
				1"	23			B7	
				1-1/4"	25				
10"	2-1/2"	3-1/2"	2500	1-15/16"					PH10QB85
				3/4"	93~	69			PH10QB**
				1"	24	R1	58	B8	
				1-1/4"	26				
10"	3"	3-1/2"	2900	1-15/16"					PH10LB85
				3/4"	93~	69			PH10LB**
				1"	24	R1	58	B8	
				1-1/4"	26				
12"	2-1/2"	3"	3000	1-15/16"					PH12KB85
				3/4"	93~	89			PH12KB**
				1"	23			B7	
				1-1/4"	25				
12"	2-1/2"	3-1/2"	3000	1-15/16"					PH12QB85
				3/4"	93~				PH12QB**
				1"	24	R1	58	B8	
				1-1/4"	26				
12"	3"	3-1/2"	3500	1-15/16"					PH12LB85
				3/4"	93~	69			PH12LB**
				1"	24	R1	58	B8	
				1-1/4"	26				
12"	3.5"	4-1/4"	4000	2-7/16"					PH12MB86
		4-9/16"		1-1/4"	31				PH12MB31
				1-1/2"	33				PH12MB33
12"	4" Straight-sided	4"	6500	2-7/16"					PH12NB86
				1-1/2"	39				PH12NB39
16"	3"	4-1/4"	4000	2-7/16"					PH16LB86
		4-9/16"		1-1/4"	31				PH16LB31
				1-1/2"	33				PH16LB33
16"	4"	5-1/4"	8000	2-7/16"					PH16NB86
				1-1/4"	32				PH16NB32
				1-1/2"	34				PH16NB34
18"	3"	3-1/2"	3500	1-15/16"					PH18LB85
				3/4"	93~	69			PH18LB**
				1"	24	R1	58	B8	
				1-1/4"	26				

~includes
spanner